

SENSOR TAP

SENSOR TAP



2200



2871



2650



2201



2510



2900



2680



2660



2504



2900



2690



MIKI-0068



8302



8303



2433



2436

SENSOR TAP



Crystal

Realizing every inspiration into a finish item is full of surprises and challenges. The water flow gently runs across the fingertips as cascade. Crystal series shines through the shades and light to show one's noble personality.



Circle

Say goodbye to monotonous restrooms and Hello to an abundance of new and exciting restroom ideas. MIKI combines straight lines and circles in a unique and minimalist way.

SENSOR TAP



2200



Standard Model : MIKI-2200-DC

Standard Model : MIKI-2200-AC

WELS 1 Model : MIKI-2200-DC-G1

WELS 1 Model : MIKI-2200-AC-G1


WELS 2 Model : MIKI-2200-DC-G2

WELS 2 Model : MIKI-2200-AC-G2

WSD reference No.: C20170356

Technical information :

Installation	: desk mount
Power supply	: DC battery / AC power
Sensing distance	: 80mm
Operating pressure	: 1-8 bar
Over-time protection	: 60 seconds auto cut
Standard flow rate	: 6L/per min
WELS 1	: TN 17-0017
WELS 1	: 1.4L/per min 花灑出水
WELS 2	: TN 17-0002
WELS 2	: 2.8L/per min 花灑出水

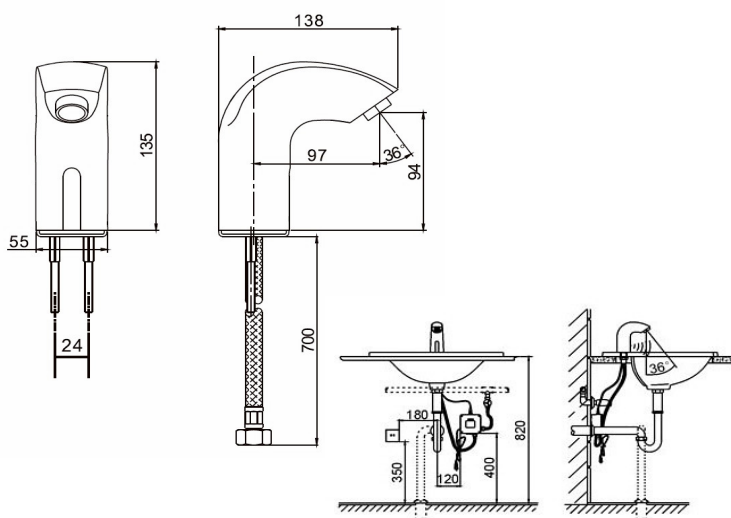

2871



Standard Model : MIKI-2871(DC)

Standard Model : MIKI-2871(AC)


WELS 2 Model : MIKI-2871-2.6L-DC

WELS 2 Model : MIKI-2871-2.6L-AC

HKWSD Approval Product : C20140022

Technical information :

Installation	: desk mount
Power supply	: DC battery / AC power
Sensing distance	: 80mm
Operating pressure	: 1-8 bar
Over-time protection	: 60 seconds auto cut
Standard flow rate	: 5.8L/per min
WELS 2	: TN 17-0003
WELS 2	: 2.6L/per min 花灑出水

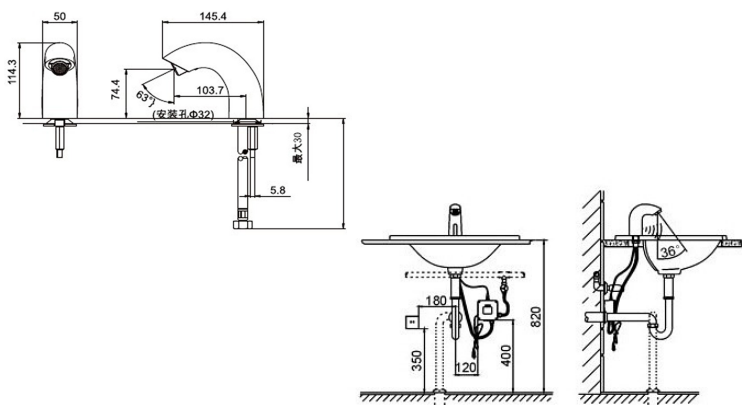

SENSOR TAP

2436

Standard Model : MIKI-2436-DC

Standard Model : MIKI-2436-AC


WELS 2 Model : MIKI-2436-3.3L-DC

WELS 2 Model : MIKI-2436-3.3L-AC

HKWSD Approval Product : C20140166

Technical information :

Installation	: Wall mount
Power supply	: DC battery / AC power
Sensing distance	: 80mm
Operating pressure	: 1-8 bar
Over-time protection	: 60 seconds auto cut
Standard flow rate	: 7.8L/per min
WELS 2	: TN 17-0006
WELS 2	: 3.3L/per min 花灑出水

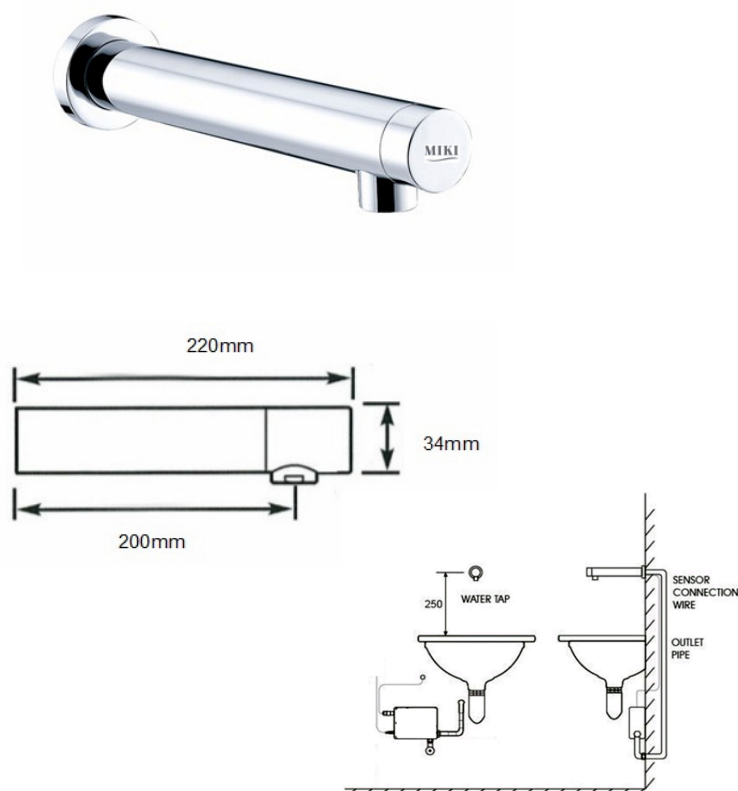

2433

Standard Model : MIKI-2433-DC

Standard Model : MIKI-2433-AC

WELS 1 Model : MIKI-2433-DC-G1

WELS 1 Model : MIKI-2433-AC-G1


WELS 3 Model : MIKI-2433-DC-G3

WELS 3 Model : MIKI-2433-AC-G3

HKWSD Approval Product : C20160617

Technical information :

Installation	: Wall mount
Power supply	: DC battery / AC power
Sensing distance	: 80mm
Operating pressure	: 1-8 bar
Over-time protection	: 60 seconds auto cut
Standard flow rate	: 7.65L/per min
WELS 1	: TN 18-0062
WELS 1	: 1.6L/per min 花灑出水
WELS 3	: TN 17-0008
WELS 3	: 4.1L/per min 花灑出水

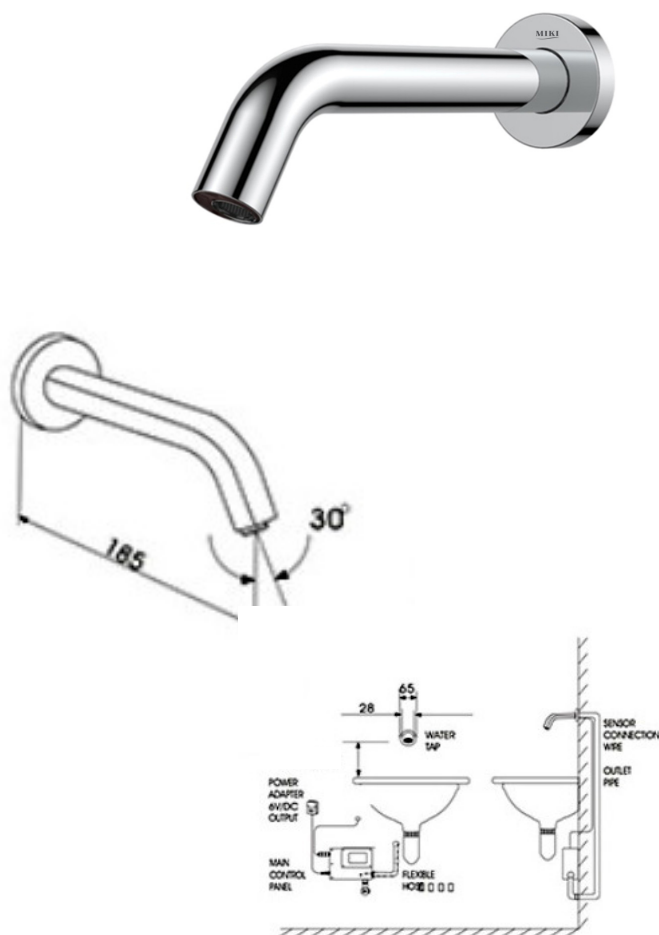

SENSOR TAP



2650




Model : MIKI-2650-DC

Model : MIKI-2650-AC

Technical information :

installation	: desk mount
Power supply	: DC battery / AC power
Sensing distance	: 80mm
Operating pressure	: 1-8 bar
Over-time protection	: 60 seconds auto cut
Standard flow rate	: 6L/per min
Optional Aerator	: 2L/per min 花灑出水

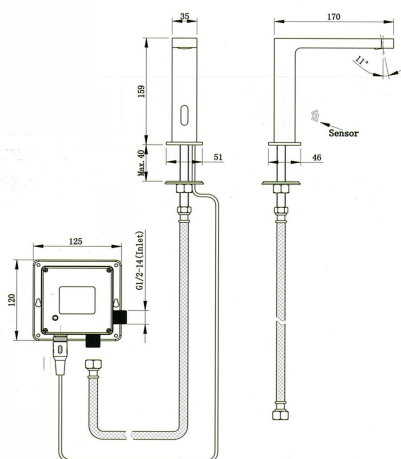

2201



Standard Model : MIKI-2201-DC

Standard Model : MIKI-2201-AC


WELS 1 Model : MIKI-2201-DC-G1

WELS 1 Model : MIKI-2201-AC-G1

HKWSD Approval Product : C20170762

Technical information :

installation	: desk mount
Power supply	: DC battery / AC power
Sensing distance	: 80mm
Operating pressure	: 1-8 bar
Over-time protection	: 60 seconds auto cut
Standard flow rate	: 6L/per min
WELS 1	TN 18-0001
WELS 1	: 1.8L/per min 花灑出水

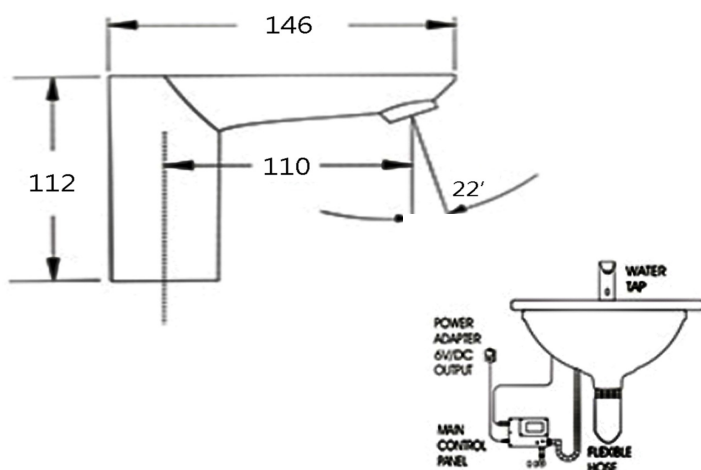

SENSOR TAP




2510

Model : MIKI-2510-DC

Model : MIKI-2510-AC

Technical information :

installation	: desk mount
Power supply	: DC battery / AC power
Sensing distance	: 80mm
Operating pressure	: 1-8 bar
Over-time protection	: 60 seconds auto cut
Standard flow rate	: 6L/per min
Optional Aerator	: 1.5L/per min 花灑出水
Optional Aerator	: 3.1L/per min 花灑出水

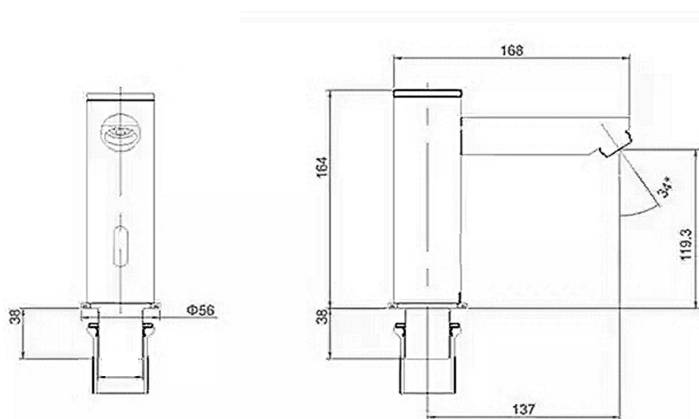

MIKI




2510h

Model : MIKI-2510h-DC

Model : MIKI-2510h-AC

Technical information :

installation	: desk mount
Power supply	: DC battery / AC power
Sensing distance	: 80mm
Operating pressure	: 1-8 bar
Over-time protection	: 60 seconds auto cut
Standard flow rate	: 6L/per min
Optional Aerator	: 1.5L/per min 花灑出水

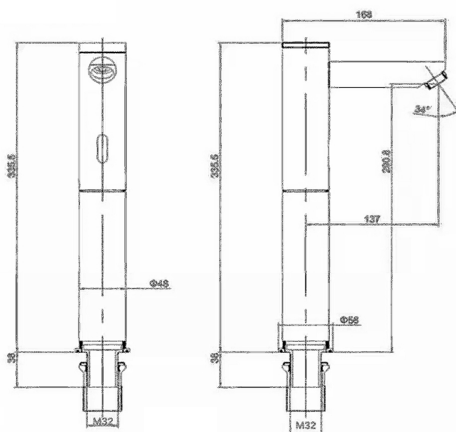

SENSOR TAP


2660

Model : MIKI-2660-DC

Model : MIKI-2660-AC

Technical information :

installation	: desk mount
Power supply	: DC battery / AC power
Sensing distance	: 80mm
Operating pressure	: 1-8 bar
Over-time protection	: 60 seconds auto cut
Standard flow rate	: 6L/per min
Optional	: 2L/per min 花灑出水

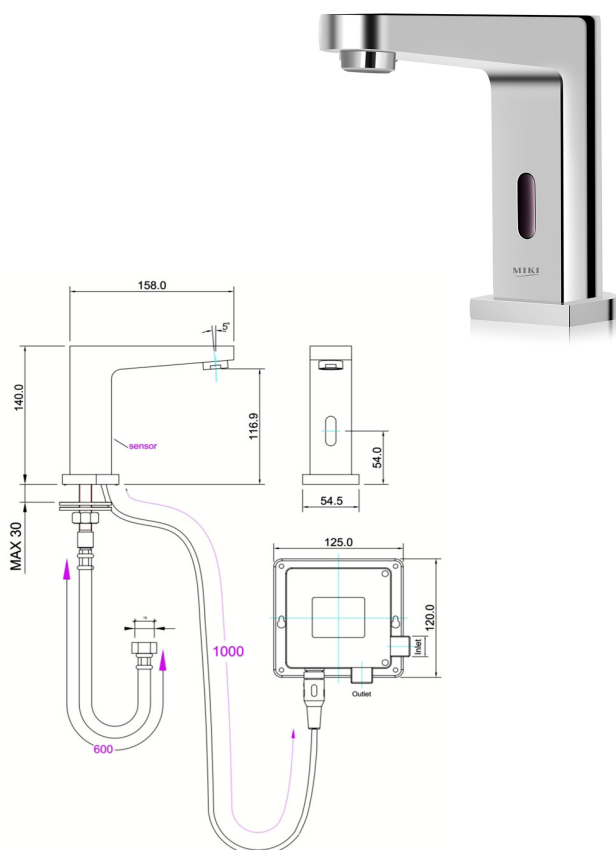


2680

Model : MIKI-2680-DC

Model : MIKI-2680-AC

Technical information :

installation	: desk mount
Power supply	: DC battery / AC power
Sensing distance	: 80mm
Operating pressure	: 1-8 bar
Over-time protection	: 60 seconds auto cut
Standard flow rate	: 6L/per min
Optional	: 2L/per min 花灑出水

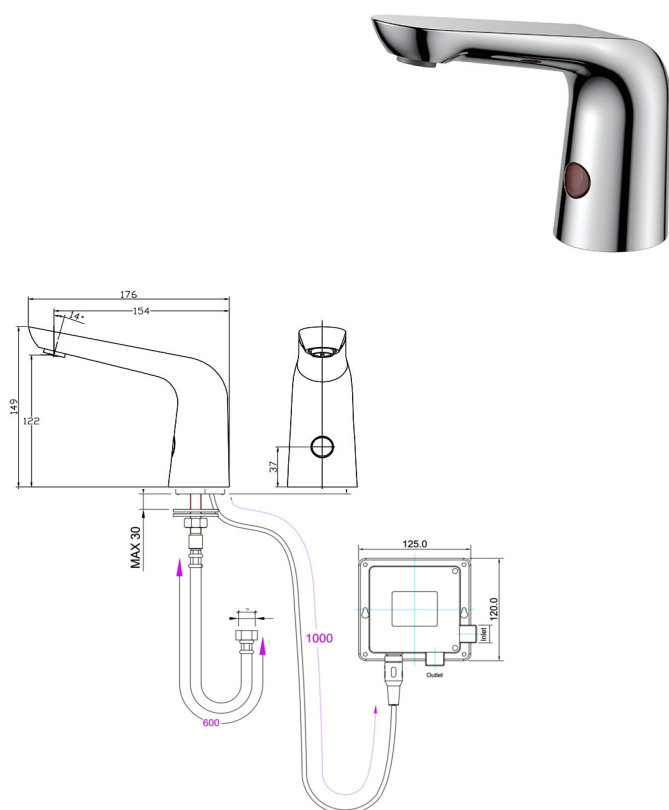

SENSOR TAP





2900

Model : MIKI-2900-DC

Model : MIKI-2900-AC

Technical information :

installation	: desk mount
Power supply	: DC battery / AC power
Sensing distance	: 80mm
Operating pressure	: 1-8 bar
Over-time protection	: 60 seconds auto cut
Standard flow rate	: 7.65L/per min

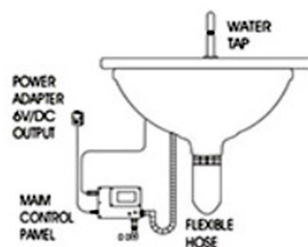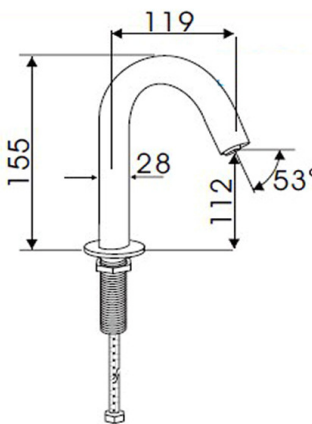



2901

Model : MIKI-2901-DC

Model : MIKI-2901-AC

Technical information :

installation	: desk mount
Power supply	: DC battery / AC power
Sensing distance	: 80mm
Operating pressure	: 1-8 bar
Over-time protection	: 60 seconds auto cut
Standard flow rate	: 7.65L/per min

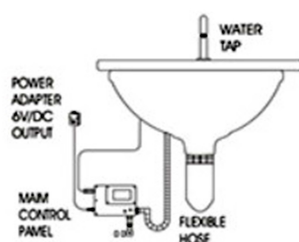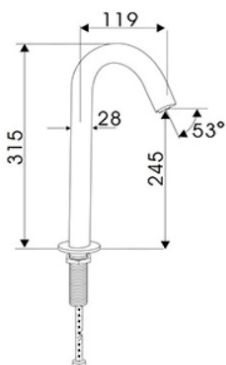

SENSOR TAP



2503

Model : MIKI-2503-DC

Model : MIKI-2503-AC

Technical information :

installation	: desk mount
Power supply	: DC battery / AC power
Sensing distance	: 80mm
Operating pressure	: 1-8 bar
Over-time protection	: 60 seconds auto cut




2504

Model : MIKI-2504-DC

Model : MIKI-2504-AC

Technical information :

installation	: desk mount
Power supply	: DC battery / AC power
Sensing distance	: 80mm
Operating pressure	: 1-8 bar
Over-time protection	: 60 seconds auto cut

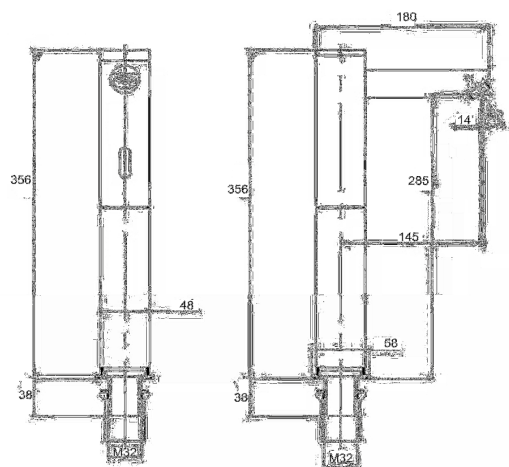

SENSOR TAP




2442

Model : MIKI-2442-DC

Technical information :

installation	: Wall mount
Power supply	: DC battery
Sensing distance	: 80mm
Operating pressure	: 1-8 bar
Over-time protection	: 60 seconds auto cut
Standard flow rate	: 7.8L/per min
Optional	: 2L/per min 花灑出水

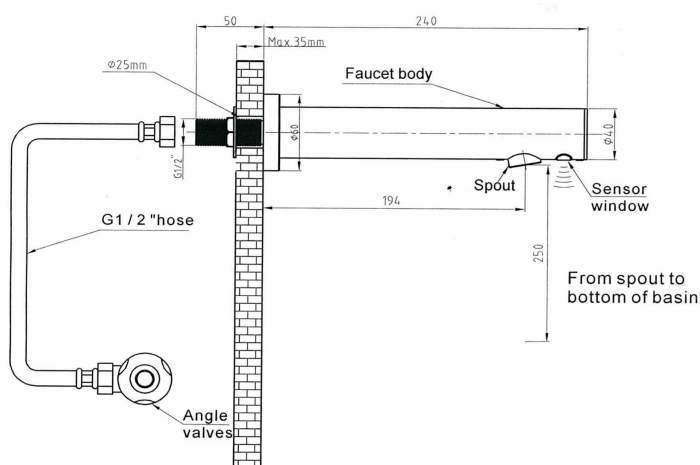


2608

Model : MIKI-2608-DC

Model : MIKI-2608-AC

Technical information :

installation	: desk mount
Power supply	: DC battery / AC power
Sensing distance	: 80mm
Operating pressure	: 1-8 bar
Over-time protection	: 60 seconds auto cut
Standard flow rate	: 7.8L/per min

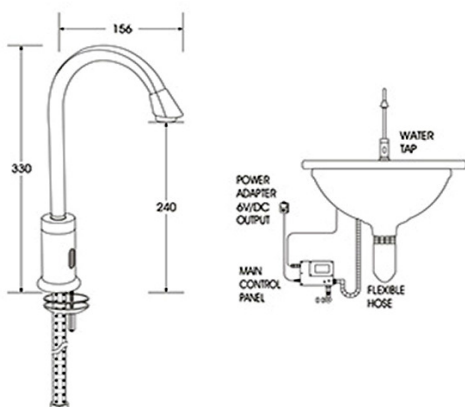

SENSOR TAP - THERMOSTATIC MIXER


MIKI-0068



Model No.: MIKI-0068

Technical information :


installation	: desk mount / wall mount
Water supply	: cold & hot water
Water temperature	: Max 70°C
Operating pressure	: 4-6 bar

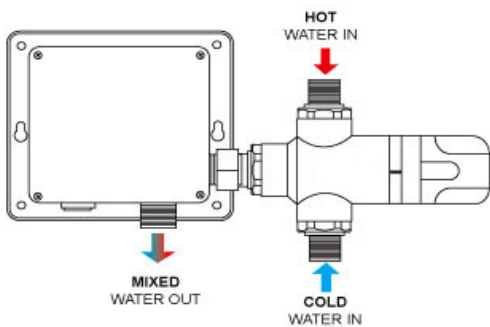

2690

Model : MIKI-2690-DC

Model : MIKI-2690-AC

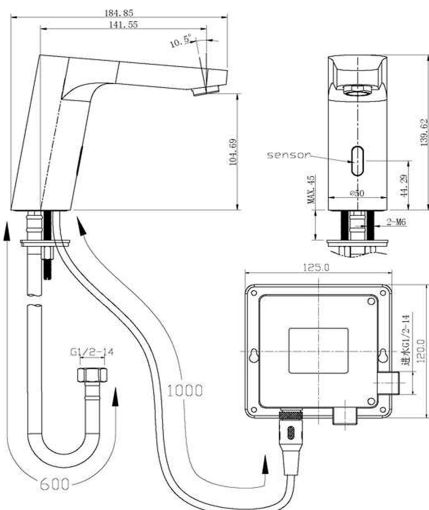

Technical information :

installation	: desk mount
Power supply	: DC battery / AC power
Sensing distance	: 80mm
Operating pressure	: 1-8 bar
Over-time protection	: 60 seconds auto cut
Standard flow rate	: 6L/per min
Optional	: 2L/per min 花灑出水

SENSOR TAP




8303

Model : MIKI-8303-DC

Model : MIKI-8303-AC

Technical information :

installation	: desk mounted
Power supply	: DC battery / AC power
Sensing distance	: 80mm
Operating pressure	: 4-6 bar
Over-time protection	: 60 seconds auto cut
Standard flow rate	: 6L/per min
Optional	: 2L/per min 花灑出水

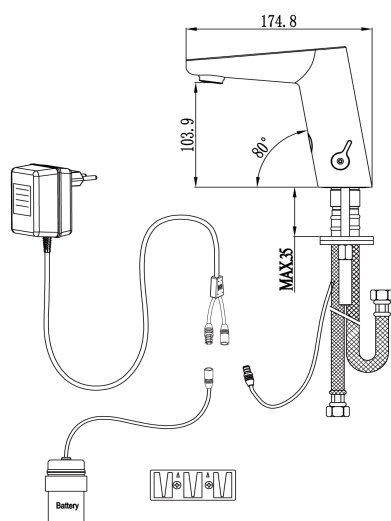

10




8302

Model : MIKI-8302-DC

Model : MIKI-8302-AC


Technical information :

installation	: desk mounted
Power supply	: DC battery / AC power
Sensing distance	: 80mm
Operating pressure	: 4-6 bar
Over-time protection	: 60 seconds auto cut
Standard flow rate	: 6L/per min
Optional	: 2L/per min 花灑出水

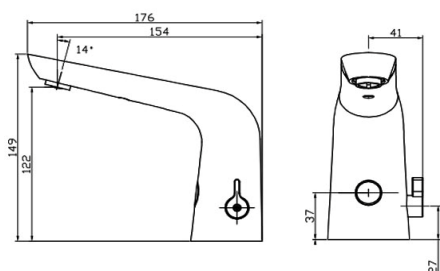

SENSOR SOAP

SENSOR SOAP

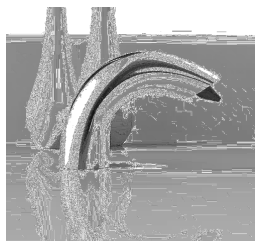

3980 II



3986-V2-CU



3300



3980VR2



3940



K64



3989.01a




3988.01a



3995



3983II



3984



3982II



K30S



K65

SENSOR SOAP



Presents an organic design

Paired with MIKI new wall-mount sensor tap and soap dispenser, MIKI provide an exceptional design for high-end commercial environments.



Sweet Twins

MIKI sensor tap offers a sleek, contemporary design that pairs with that for a beautiful, low-maintenance aesthetic that would be the envy of any building owner. While the concealed sensor maintains the minimalist design. paired with the MIKI tap, this sensor liquid soap dispenser creates a clean, contemporary look that its sleek, concealed sensor design reduces its footprint and maintains a minimalist look.

SENSOR SOAP




3980 II

Model : MIKI-3980 II-AC

Technical information :

installation	: desk mounted
Soap type	: Liquid soap
Power supply	: AC power
Sensing distance	: 80mm
Soap viscosity	: 100-2800 cPs
Bottle capacity	: 1000mL

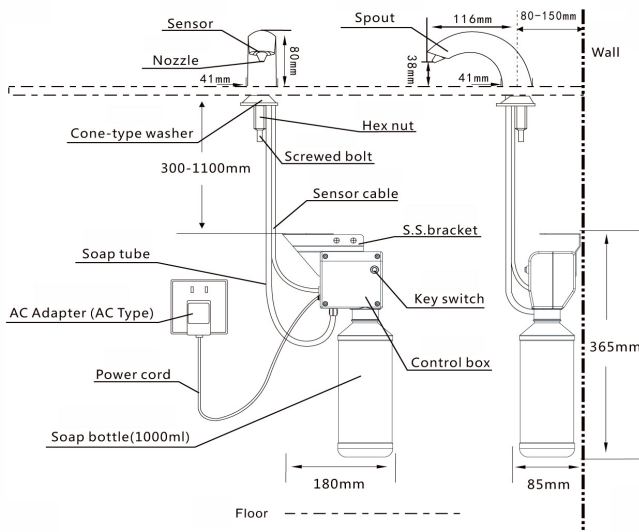


3980VR2

Model : MIKI-3980VR2-AC

Technical information :

installation	: desk mounted
Soap type	: Liquid soap
Power supply	: AC power
Sensing distance	: 80mm
Soap viscosity	: 100-2800 cPs
Bottle capacity	: 1000mL

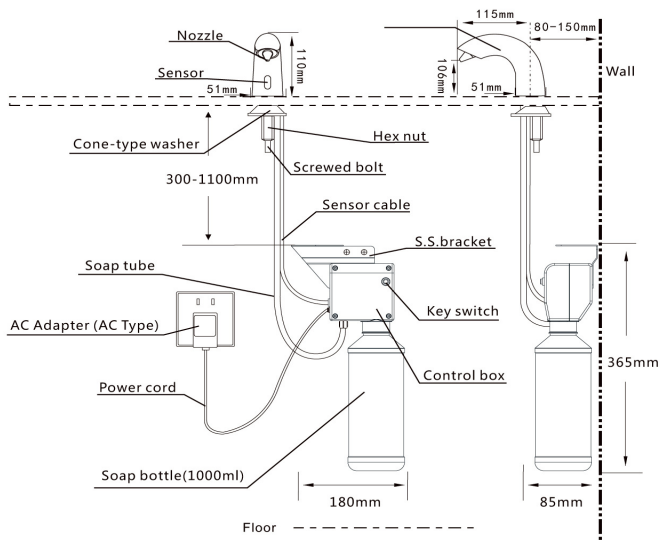

SENSOR SOAP




3940

Model : MIKI-3940-AC

Technical information :

installation	: desk mounted
Soap type	: Liquid soap
Power supply	: AC power
Sensing distance	: 80mm
Soap viscosity	: 100-2800 cPs
Bottle capacity	: 1000mL

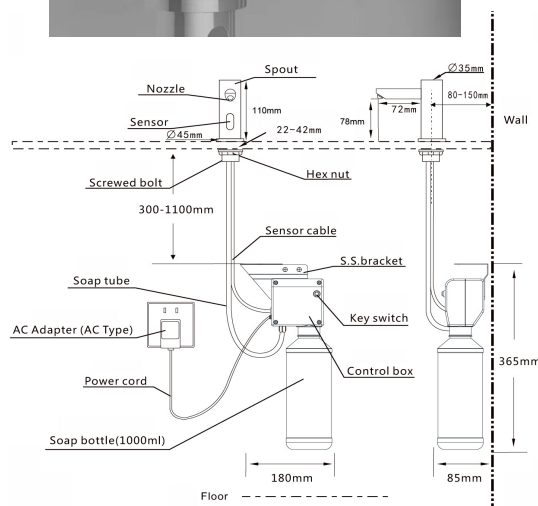


3986V2-CU

Model : MIKI-3986V2-CU-AC

Technical information :

installation	: desk mounted
Soap type	: Liquid soap
Power supply	: AC power
Sensing distance	: 80mm
Soap viscosity	: 100-2800 cPs
Bottle capacity	: 1000mL

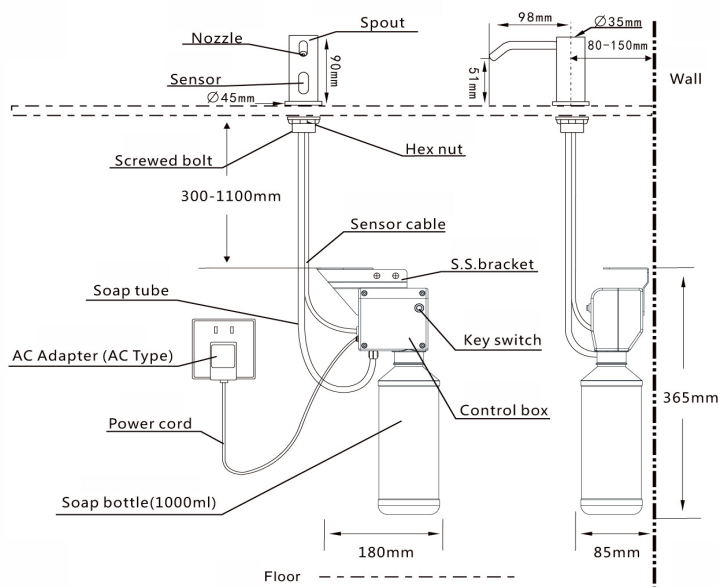

SENSOR SOAP




3988.01a

Model : MIKI-3988.01a-AC

Technical information :

installation	: desk mounted
Soap type	: Liquid soap
Power supply	: AC power
Sensing distance	: 80mm
Soap viscosity	: 100-2800 cPs
Bottle capacity	: 1500mL


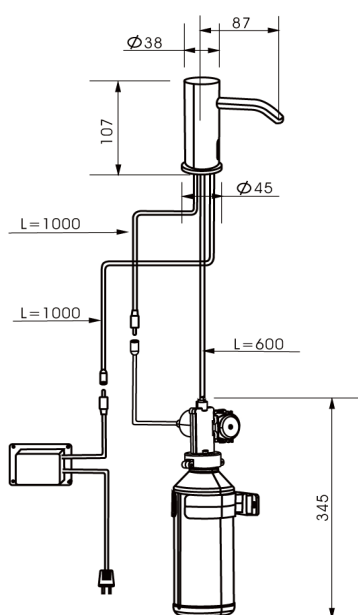


3989.01a

Model : MIKI-3989.01a-AC

Technical information :

installation	: desk mounted
Soap type	: Liquid soap
Power supply	: AC power
Sensing distance	: 80mm
Soap viscosity	: 100-2800 cPs
Bottle capacity	: 1500mL

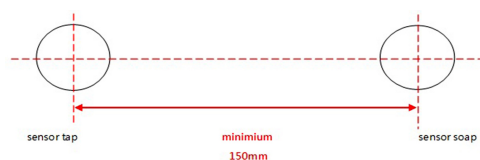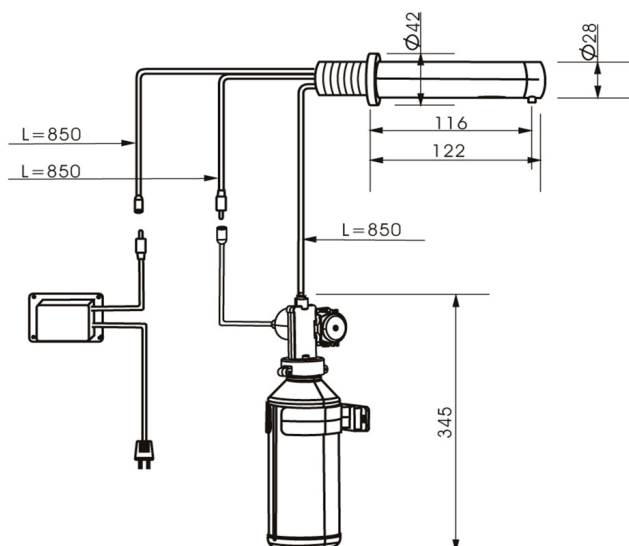

SENSOR SOAP





3983 II

Model : MIKI-3983 II-AC

Technical information :

installation	: desk mount
Soap type	: Liquid soap
Power supply	: AC power
Sensing distance	: 80mm
Soap viscosity	: 100-2800 cPs
Bottle capacity	: 1000mL

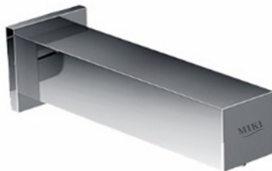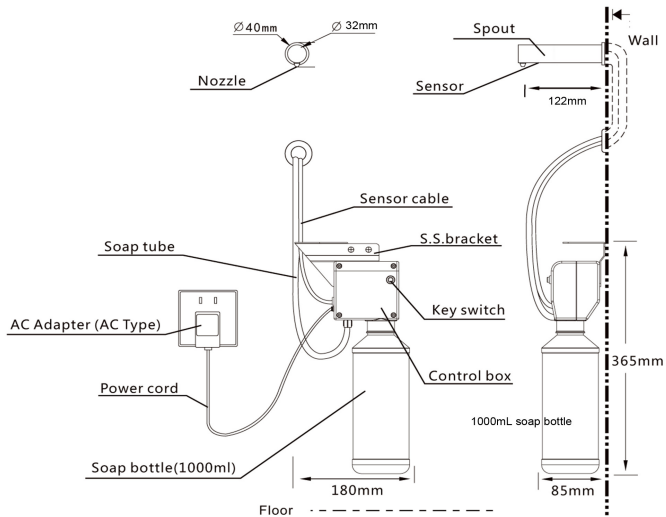


3984 II

Model : MIKI-3984 II-AC

Technical information :

installation	: desk mount
Soap type	: Liquid soap
Power supply	: AC power
Sensing distance	: 80mm
Soap viscosity	: 100-2800 cPs
Bottle capacity	: 1000mL

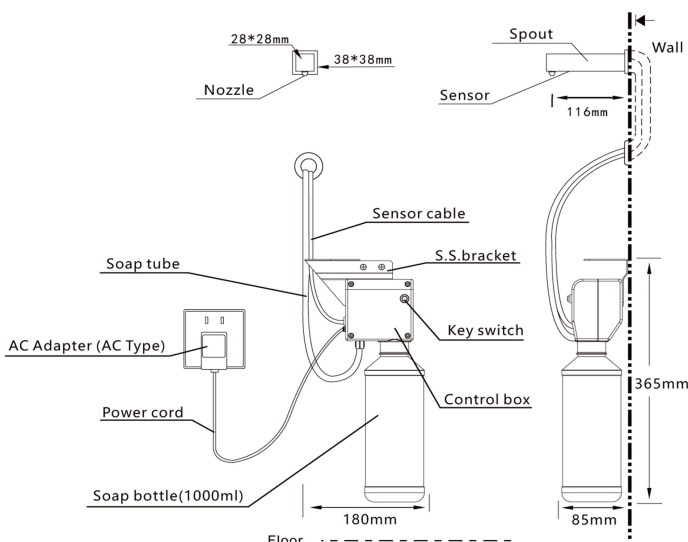

SENSOR SOAP




3982 II

Model : MIKI-3982 II-AC

Technical information :

installation	: Wall mount
Soap type	: Liquip soap
Power supply	: AC power
Sensing distance	: 80mm
Soap viscosity	: 100-2800 cPs
Bottle capacity	: 1000mL

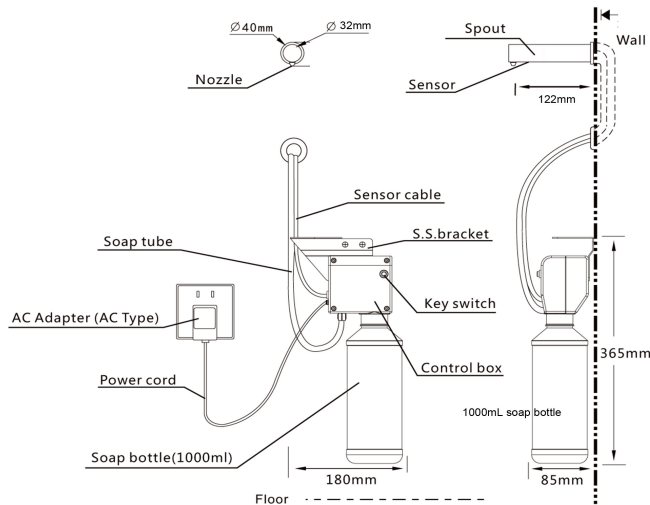


3995

Model : MIKI-3995-AC

Technical information :

installation	: conceal type
Soap type	: Liquip soap
Power supply	: AC power
Sensing distance	: 80mm
Soap viscosity	: 100-2800 cPs
Bottle capacity	: 1000mL

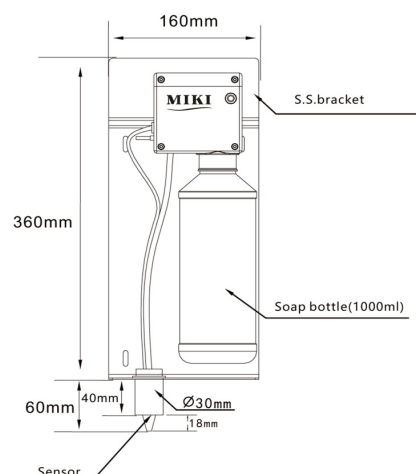

SENSOR SOAP





3300

Model : MIKI-3300-DC

Technical information :

Type	: Sensor Soap dispenser
Soap type	: Liquid soap
Material	: 304 stainless steel
Sensor size	: 112 x 100 x 210mm
Power supply	: DC , alkaline battery
Battery	: without include battery
Sensing range	: 50mm $\pm$ 3cm
Capacity	: 650 mL
Minimum time - respons	: 3 seconds
Color	: Satin

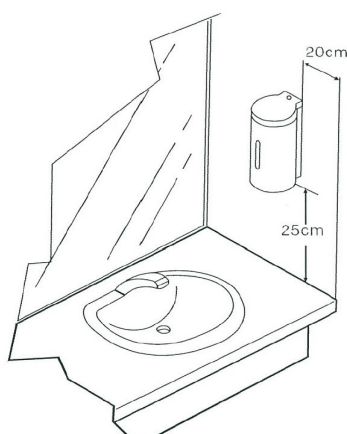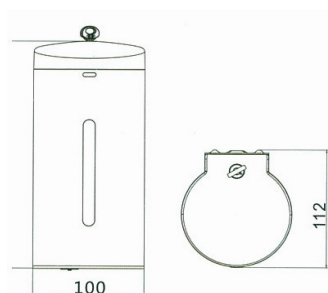

K64

Model : MIKI-K64-DC

Technical information :

Type	: Sensor Soap dispenser
Soap type	: Liquid soap
Material	: ABS
Sensor size	: 95 x 140 x 240mm
Power supply	: DC , alkaline battery
Battery	: without include battery
Sensing range	: 50mm $\pm$ 3cm
Capacity	: 1000 mL
Key Lock Function	: Yes
Color	: White



SENSOR TOILET SEAT CLEANER




K30S

Model No.: MIKI-K30S

Technical information :

installation	: wall mounted
Soap type	: Alcohol sanitizer
Capacity	: 500mL
Size	: 115 x 99 x 198 mm

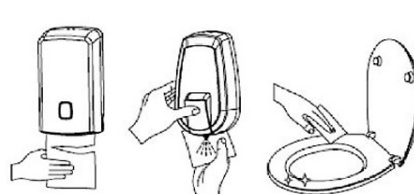

SENSOR Alcohol



K65

Model : MIKI-K65-DC

Technical information :

Type	: Sensor Alcohol
Soap type	: Alcohol
Material	: ABS
Sensor size	: 95 x 140 x 240mm
Power supply	: DC , alkaline battery
Battery	: without include battery
Sensing range	: 50mm $\pm$ 3cm
Capacity	: 1000 mL
Key Lock Function	: Yes
Color	: White

URINAL SENSOR

URINAL SENSOR



1100



1100-Silver



1100-Black



A3



A2



1100-circle



1200

URINAL SENSOR



Square X

An amateur artist catch every opportunity to express individuality and the commercial design is the best place for them to express individuality and the commercial project is the best place for them to express themselves. Therefore, we fit all modern elements into the restroom which reveal character.



URINAL SENSOR

1100



Standard Model : MIKI-1100-DC

Standard Model : MIKI-1100-AC


WELS 1 Model : MIKI-1100-DC-G1

WELS 1 Model : MIKI-1100-AC-G1

HKWSD Approval Product : C20180145F

Technical information :

Power supply	: DC / AC
Sensing distance	: 70cm ± 15
Operating pressure	: 1-8 bar
Material	: Brass Chrome, Bright Finish
Connector of water supply	: G1/2"
Sensor Panel dimension	: 120 x 120mm
Concealed Case dimension	: 200 x 128 x 65mm
2 Flush type	: Pre-flush & after flush
Response time	: 3 seconds
Self cleaning	: 24 hours
WELS 1	: 1U 17-0004
WELS 1	: 1.8L/per min

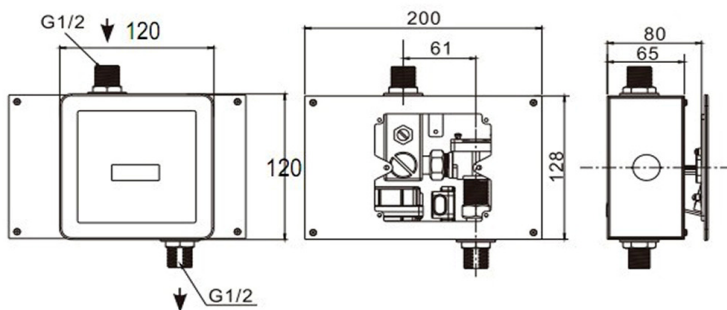

1100 silver panel



Standard Model : MIKI-1100 silver panel-DC

Standard Model : MIKI-1100 silver panel-AC


WELS 1 Model : MIKI-1100 silver panel-DC-G1

WELS 1 Model : MIKI-1100 silver panel-AC-G1

HKWSD Approval Product : C20180145F

Technical information :

Power supply	: DC / AC
Sensing distance	: 70cm ± 15
Operating pressure	: 1-8 bar
Material	: Brass Chrome, Bright Finish
Connector of water supply	: G1/2"
Sensor Panel dimension	: 130 x 130mm
Concealed Case dimension	: 200 x 128 x 65mm
2 Flush type	: Pre-flush & after flush
Response time	: 3 seconds
Self cleaning	: 24 hours
WELS Grade 1	: 1.8L/per min

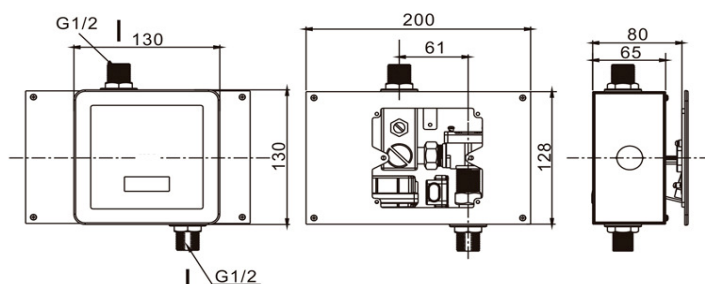

URINAL SENSOR



1100 Black panel



Standard Model : MIKI-1100 black panel-DC

Standard Model : MIKI-1100 black panel-AC


WELS 1 Model : MIKI-1100 black panel-DC-G1

WELS 1 Model : MIKI-1100 black panel-AC-G1

HKWSD Approval Product : C20180145F

Technical information :

Power supply	: DC / AC
Sensing distance	: 70cm $\pm$ 15
Operating pressure	: 1-8 bar
Material	: Brass Chrome, Bright Finish
Connector of water supply	: G1/2"
Sensor Panel dimension	: 120 x 120mm
Concealed Case dimension	: 200 x 128 x 65mm
2 Flush type	: Pre-flush & after flush
Response time	: 3 seconds
Self cleaning	: 24 hours
WELS Reference	: 1U 17-0004
WELS Grade 1	: 1.8L/per min

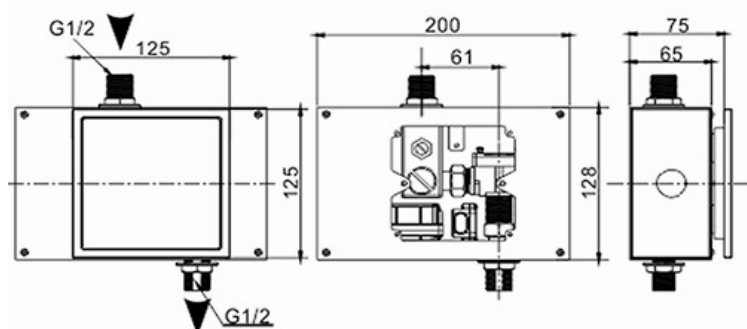

1100 circle panel




Standard Model : MIKI-1100 circle panel-AC

WELS 1 Model : MIKI-1100 circle panel-AC-G1

HKWSD Approval Product : C20180145F

Technical information :

Power supply	: AC
Sensing distance	: 70cm $\pm$ 15
Operating pressure	: 1-8 bar
Material	: Brass Chrome, Bright Finish
Connector of water supply	: G1/2"
Sensor Panel dimension	: $\varnothing$ 50mm
2 Flush type	: Pre-flush & after flush
Response time	: 3 seconds
WELS Reference	: 1U 17-0004
WELS Grade 1	: 1.8L/per min

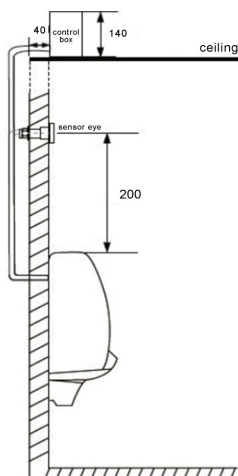

URINAL SENSOR


A2

Model : MIKI-A2-DC

Model : MIKI-A2-AC

Technical information :

Power supply	: DC / AC
Sensing distance	: 70cm $\pm$ 15
Operating pressure	: 1-8 bar
Material	: Brass Chrome, Bright Finish
Connector of water supply	: G1/2"
Sensor Panel dimension	: 118.5 x 123mm
Concealed Case dimension	: 126 x 128 x 60mm
2 Flush type	: Pre-flush & after flush
Response time	: 3 seconds
Self cleaning	: 24 hours

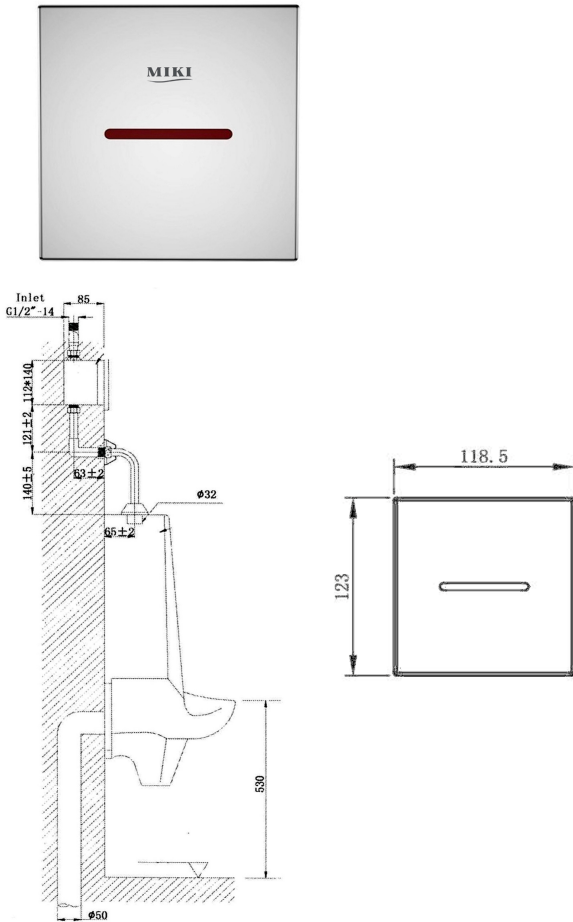


A3

Model : MIKI-A3-DC

Model : MIKI-A3-AC

Technical information :

Power supply	: DC / AC
Sensing distance	: 70cm $\pm$ 15
Operating pressure	: 1-8 bar
Material	: Brass Chrome, Bright Finish
Connector of water supply	: G1/2"
Sensor Panel dimension	: 120 x 123mm
Concealed Case dimension	: 126 x 128 x 60mm
2 Flush type	: Pre-flush & after flush
Response time	: 3 seconds

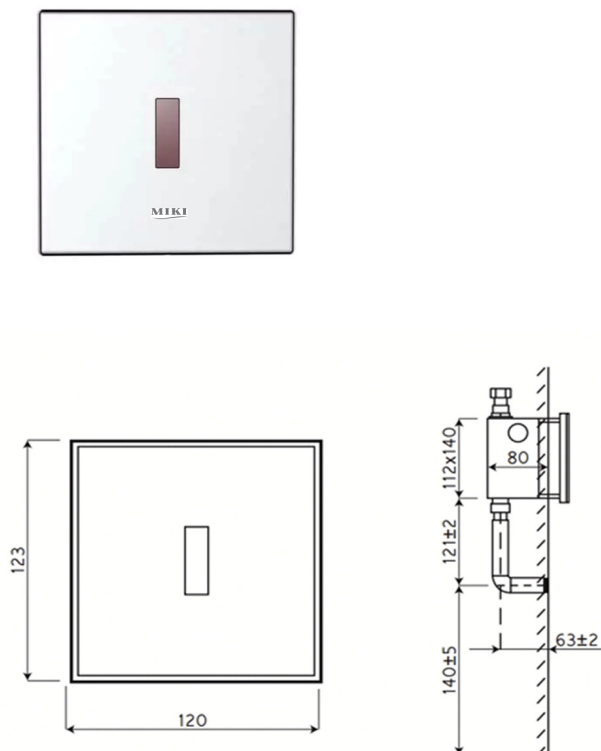


URINAL SENSOR

1200

Model : MIKI-1200-DC

Technical information :

Installation	: Exposed
Voltage	: DC
Sensing range	: 67mm ~ 80cm
Water inlet	: G1/2"
Working water pressure	: 3-6 bar
Finish	: ABS plastic plating Bright Finish
Response time	: 3 seconds
Flush mode	: Pre-flush & after flush
Self cleaning	: 24 hrs
DC type	: Battery box only without Battery

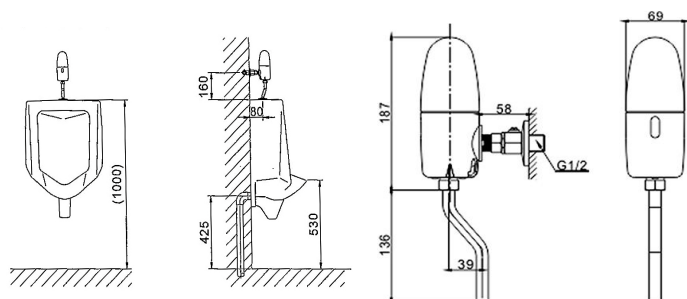

TOILET SENSOR SYSTEM

WC TOILET SENSOR



6472



6872



6872-SK



6881-SK-DUX



6881DUX



6882X



6992.03



6992.04

WC TOILET SENSOR



6472-D-DC 6472-AC



Wave on sensor flush with utton (2 in 1)

HKWSD Approval Product : C20160210F






Function :

1. Touchless sensor flush
2. Red LED Lighting
3. 2 in 1 circle design
4. Waterproof Level : IP67
5. Manual Override Button

Technical information :

installation	: Exposed type
Power supply	: DC / AC
Sensing distance	: 100mm
Sensor eye size	: Face Ø48mm , Hole Ø40mm
Sensor Flush valve	: 2 inch flush valve
cistern internal minimum(H)	: 290mm
Response time	: 2 seconds

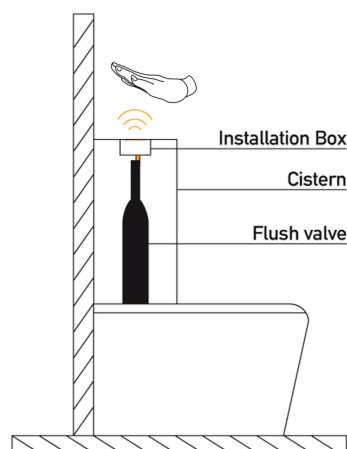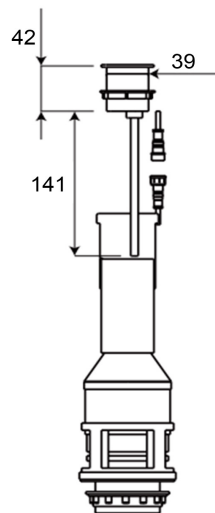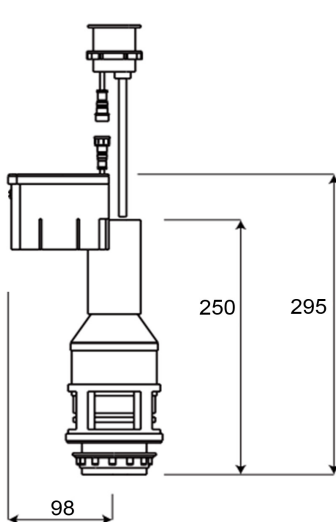

MIKI is Ideal for :

- Commercial building and office building
- Shopping malls and centres
- Schools and educational institutes
- Clinics and hospital
- Hotels , Club house and Restaurants
- Nursing homes
- Playground & Entertainment facilities

WC TOILET SENSOR



6872-AC



wave on sensor flush with button (2 in 1)

HKWSD Approval Product : C20160210F

Function :

1. Touchless sensor flush
2. Red LED Lighting
3. 2 in 1 circle design
4. Waterproof Level : IP67
5. Manual Override Button

Technical information :

installation	: Concealed type
Power supply	: AC
Sensing distance	: 100mm
Sensor eye size	: Face Ø48mm , Hole Ø40mm
Sensor Flush valve	: 2 inch flush valve
Cistern size	: 425 x 313 x 150mm
Response time	: 2 seconds

MIKI is Ideal for :

- Commercial building and office building
- Shopping malls and centres
- Schools and educational institutes
- Clinics and hospital
- Hotels , Club house and Restaurants
- Nursing homes
- Playground & Entertainment facilities



SP01

Plastic signage


Color : white



SP03

Stainless Steel signage

Color : satin

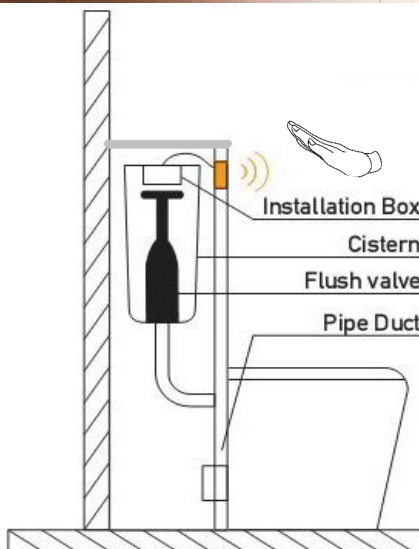

WC TOILET SENSOR



6872-SK-AC

wave on sensor flush with button (2 in 1)

HKWSD Approval Product : C20160210F

Function :


1. Touchless sensor flush
2. Red LED Lighting
3. 2 in 1 circle design
4. Waterproof Level : IP67
5. Manual Override Button

Technical information :

installation	: Concealed type
Power supply	: AC
Sensing distance	: 100mm
Sensor eye size	: Face Ø48mm , Hole Ø40mm
Sensor Flush valve	: 2 inch flush valve
Cistern size	: 335 x 320 x 139mm
Response time	: 2 seconds

MIKI is Ideal for :

Commercial building and office building
 Shopping malls and centres
 Schools and educational institutes
 Clinics and hospital
 Hotels , Club house and Restaurants
 Nursing homes
 Playground & Entertainment facilities

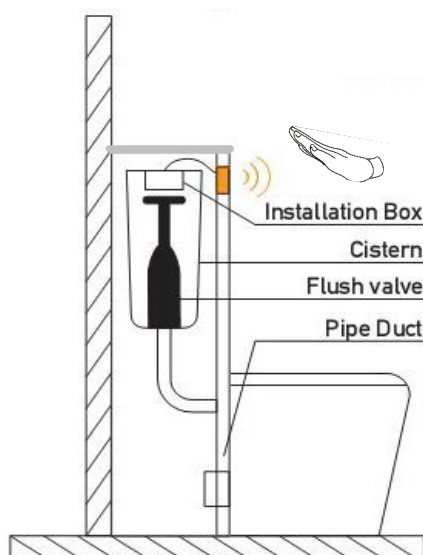

SP100

Plastic signage

Color : white



SP101

Stainless Steel signage

Color : satin

WC TOILET SENSOR



Automatic sensor



wave on sensor w/ button

6972GA-AC



Dual Sensor

Automatic sensor flush

wave on sensor flush with button (3 in 1)

HKWSD Approval Product : C20160210F




Function :

1. Automatic sensor flush
2. Wave on sensor flush
3. Button

Technical information :

installation	: Concealed type
Power supply	: AC
Auto Sensing distance	: 700mm
Wave Sensing distance	: 100mm
Sensor eye size	: Face Ø48mm , Hole Ø40mm
Sensor Flush valve	: 2 inch flush valve
Cistern size	: 425 x 313 x 150mm
Auto - response time	: 8 seconds
Wave on - response time	: 2 seconds

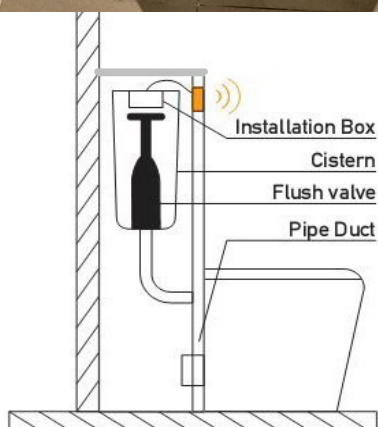

SP01

Plastic signage

Color : white




SP03

Stainless Steel signage

Color : satin

WC TOILET SENSOR

DUAL FLUSH SENSOR

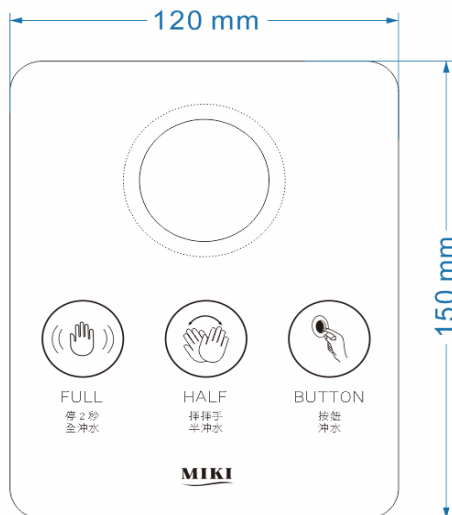

6881DUX

Dual flush sensor w/ button



Function :

1. Wave on your hand - sensor half flush
2. Hold your hand 2 second - sensor full flush
3. Pneumatic button

Technical information :

installation	: Concealed type
Power supply	: AC
Wave Sensing distance	: 80mm
Sensor eye size	: Face Ø48mm , Hole Ø40mm
Sensor Flush valve	: 2 inch flush valve
Wave on - response time	: 2 seconds



SP59

Plastic signage

Color : white



SP09

Stainless Steel signage

Color : satin

WC TOILET SENSOR

DUAL FLUSH SENSOR



6882X

Dual flush sensor w/ button



Function :

1. Wave on - sensor full flush w/ button
1. Wave on - sensor half flush



Technical information :

installation	: Concealed type
Power supply	: AC
Wave Sensing distance	: 80mm
Sensor eye size	: Face Ø48mm , Hole Ø40mm
Sensor Flush valve	: 2 inch flush valve
Wave on - response time	: 2 seconds



SP58

Plastic signage

Color : white



SP08

Stainless Steel signage

Color : satin

MIKI ECO SENSO

BODY SENSOR - DUAL FLUSH



6992.01-Black



6992.02-White

6992.01-Black panel

6992.02-White panel

Dual flush sensor

Function :

1. Automatic sensor - Full flush
2. Automatic sensor - Half flush
3. Pneumatic button
4. Red LED Lighting - Full flush
5. Blue LED Lighting - Half flush
6. Tempered glass panel

User Guide :

Stay at sensor area :


Function 1 : Half flush sensor : 4 ~ 60 seconds

Function 2 : Full flush sensor : Over 60 seconds

Function 3 : button flush

Technical information :

installation	: Concealed type
Power supply	: AC
Sensing distance	: 600mm
Sensor Panel size	: 260 x 160mm
Sensor Flush valve	: 2 inch flush valve
Response time	: 5 seconds



Panel

Code No.: 6992.01-Black


Color : Black



Panel

Code No.: 6992.02-White

Color : White

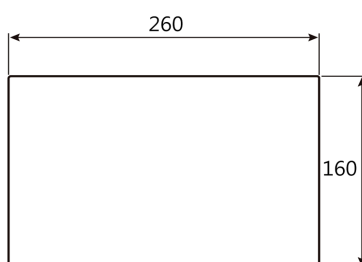

MIKI is Ideal for :

Commercial building and office building

Shopping malls and centres

Schools and educational institutes

Clinics and hospital

Hotels , Club house and Restaurants

Nursing homes

Playground & Entertainment facilities

installation Guide :

安裝位置 : sensor eye 安裝在座廁正上方


安裝距離 : sensor eye 廁板頂正上方 20mm

Flush plate with electronic, touch-free actuation

MIKI ECO SENSO is an electronic , real glass flush plate for the MIKI cistern. Flush actuation is touch-free or by means of a light tap on the plate area. The approach sensor recognises when a person approaches the toilet, and activates the illumination of the button area,, additionally serving as an orientation help in the dark. It is also possible to set additional functions such as a hygiene flush or wave on automatic flush.



MIKI ECO SENSO white #6992.04

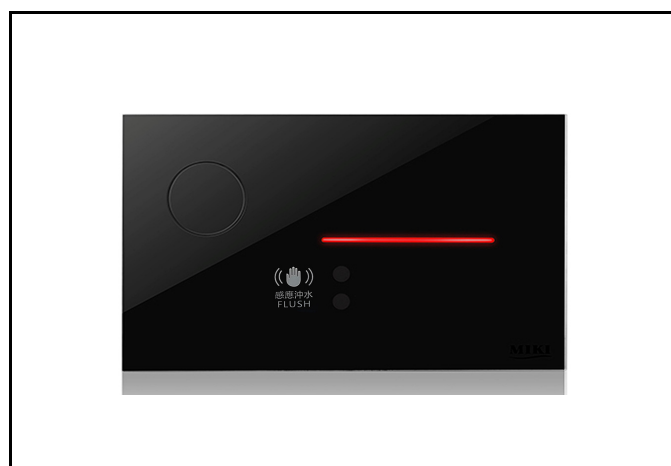

MIKI ECO SENSO Black #6992.03

Product features

Electronic actuation, touch-free or by touching the button area

High-quality, minimalist design: seamless, flat glass surface featuring a flat design

Particularly hygienic due to touch-free flush actuation

Easy to clean thanks to seamless , scratch-resistant glass surface

Approach sensor with "light function"



Touch-free actuation

MIKI ECO SENSO

WAVE ON - DUAL FLUSH SENSOR



6992.04-White panel

Wave on dual flush sensor

Function :

1. Wave on sensor full flush
2. Wave on sensor half flush
3. Pneumatic button
4. Red LED Lighting - Full flush
5. Blue LED Lighting - Half flush
6. Tempered glass panel

User Guide :

Stay at sensor area :

Function 1 : wave on - half flush sensor : 4 ~ 60 seconds

Function 2 : wave on - full flush sensor : Over 60 seconds

Function 3 : Manual flush

Technical information :

installation	: Concealed type
Power supply	: AC
Sensing distance	: 60mm
Sensor Panel size	: 260 x 160mm
Sensor Flush valve	: 2 inch flush valve
Response time	: 2 seconds

MIKI is Ideal for :

Commercial building and office building
Shopping malls and centres
Schools and educational institutes
Clinics and hospital
Hotels , Club house and Restaurants
Nursing homes
Playground & Entertainment facilities



MIKI ECO SENSO

Code No.: 6992.04-White


Color : White



MIKI ECO SENSO

Code No.: 6992.03-Black

Color : White

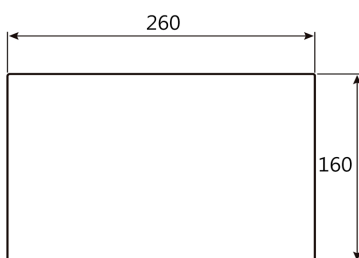

installation Guide :

安裝位置 : sensor eye 安裝在座廁正上方

安裝距離 : sensor eye 廁板頂正上方 80mm